


Electric Stacker (Export Hot Seller)



Features:

- DC controller offers high price-performance ratio.
- High power lifting system offering performance at an unbeatable value.(A)
- Side-mounted drive enhances view, offers small turning radius, great for tight spaces.
- Battery status LED and key switch mounted on the control handle for easy access.(B)
- Imported waterproof micros witches can withstand harsher environment.(C)
- Permanent magnet drive is compact, light and offers high efficiency.(D)
- Ergonomic control handle with lift up/down fingertip controls on both sides for left and right-hand use, and automatically returns to original position when released.
- Built in turtle switch facilitates operation in tight spaces and increases safety.
- External charger reduces heat and saves space(E)
- Suitable for casual usage, offering great value for the money.

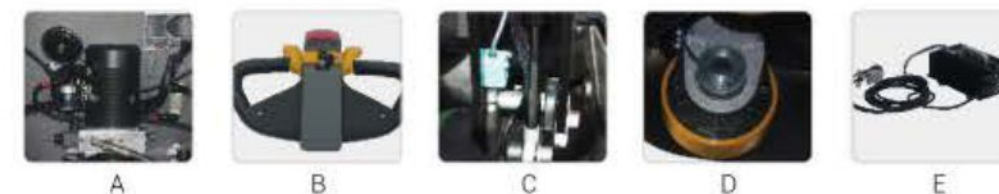

SPECIFICATIONS *

Model	Unit	ETV1016JD	ETV1030JD
Max load capacity	kg	1000	1000
Load capacity at max.height	kg	1000	700
Max lift height	mm	1600	3000
Load center	mm	600	
Fork length	mm	1150	
Width of the fork	mm	160	
External width of forks	mm	570/695	
Lowest fork height	mm	86	
Length of fixed leg	mm	928	
Width of fixed leg (including front double wheel frame)	mm	124	
Internal distance between two fixed legs	mm	262/387	
Total distance between two fixed legs, including legs	mm	534/659	
Aisle width for pallets 1000mm*1200mm crossways	mm	2048	2068
Aisle width for pallets 800mm*1200mm lengthways	mm	2014	2034
Turning radius	mm	1316	1336
Rear wheel size, qty	mm,pcs	Φ80×70, 4	
Front wheel size, qty	mm,pcs	Φ210×70, 1	
Balance wheel size, qty	mm,pcs	Φ150×58, 1	
Overall length	mm	1632	1755
Overall width	mm	795	795
Max height with mast extended	mm	2060	3424
Lowered height	mm	1990	1994
Battery idimension: L/W/H	v/ah (mm)	2×12/100 (260/169/215)	
Charger	v/ah	24/10	
Lift Motor	kw	2.2	Lifting speed (Laden/Unladen) 92/136mm/s ; Lowering speed (Laden/Unladen): 112/98mm/s
Drive motor	kw	0.75	Travel speed (Laden/Unladen) 4.0/4.2km/h
Service weight	kg	395	465

* Specifications subject to change without notice.